

## KUBO5-BL

5.25" Compact design two-way  
loudspeaker, black



KUBO5 is a 5.25" two-way loudspeaker with integrated bass reflex port providing a dynamic and fast bass response. The unseen original and timeless KUBO cabinet produces 80 watts dynamic power at 8 ohms. Multiple KUBO loudspeakers can easily be daisy chained via the in & link connection with euroblock connectors.

The K-Mount bracket & fixing K-bolts offer a safe and comfortable loudspeaker hook-up. The easy cable management and 140° vertical or horizontal mounting possibility allows you to install the KUBO5 everywhere on any type of wall or ceiling. The intuitive end-caps are very installer-friendly and are kept in place by 14 integrated strong neodymium magnets, hiding all connections and bracket hardware on both sides. KUBO will blend audio in with any kind of interior and architect designed environment.


### TECHNICAL SPECIFICATIONS

|  |                            |                                   |              |
|--|----------------------------|-----------------------------------|--------------|
| height in mm                               | 155                        | width in mm                       | 164          |
| depth in mm                                | 136                        | loudspeaker system                | 2-way        |
| woofer size in inch                        | 5.25                       | woofer cone material              | coated paper |
| tweeter size in inch                       | 1                          | mounting system                   | U-bracket    |
| colour                                     | black / white              | impedance (ohms)                  | 8            |
| low impedance dynamic power in watts       | 80                         | low impedance RMS power in watts  | 50           |
| SPL 1W/1m in dB                            | 92                         | max SPL 1m in dB                  | 106          |
| frequency response in Hz                   | 94 - 20K                   | main construction material        | ABS plastic  |
| grille main material                       | steel                      | IP rating                         |              |
| Horizontal dispersion angle 1000 Hz        | 180°                       | Vertical dispersion angle 1000 Hz | 180°         |
| closest RAL colour (subject to deviations) | RAL9016 (W) / RAL9011 (BL) | Net weight product (kg)           | 1,70         |

## POLAR PLOTS


Data Shown: KUBO5 (Apart Audio)  
Display Parameters: Frequency: 1000Hz (1/24th Octave)

Horizontal  
Vertical

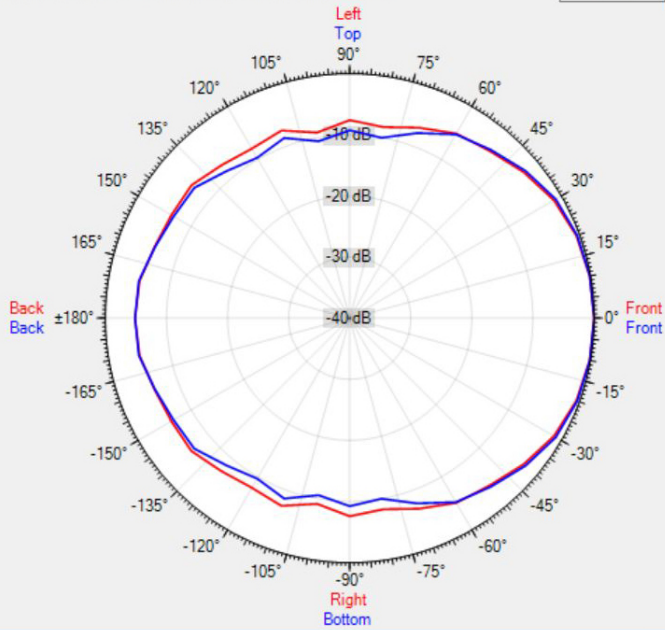


Data Shown: KUBO5 (Apart Audio)  
Display Parameters: Frequency: 2000Hz (1/24th Octave)

Horizontal  
Vertical

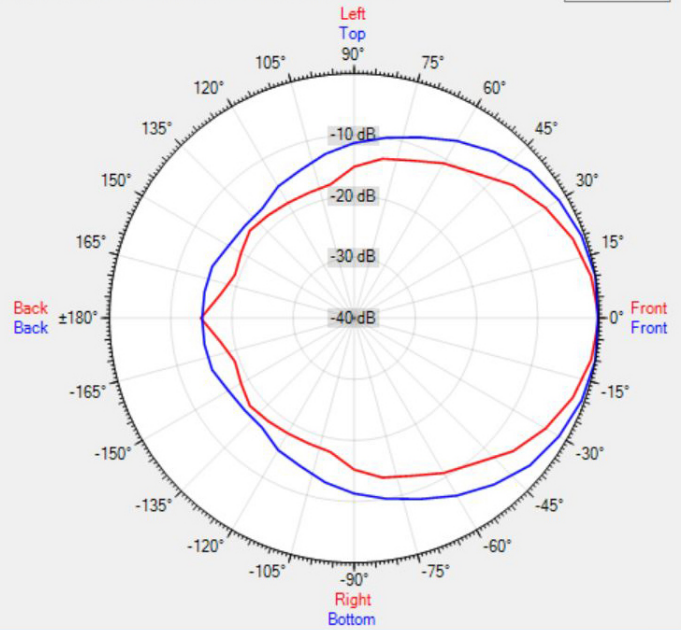


Data Shown: KUBO5 (Apart Audio)  
Display Parameters: Frequency: 4000Hz (1/24th Octave)

Horizontal  
Vertical

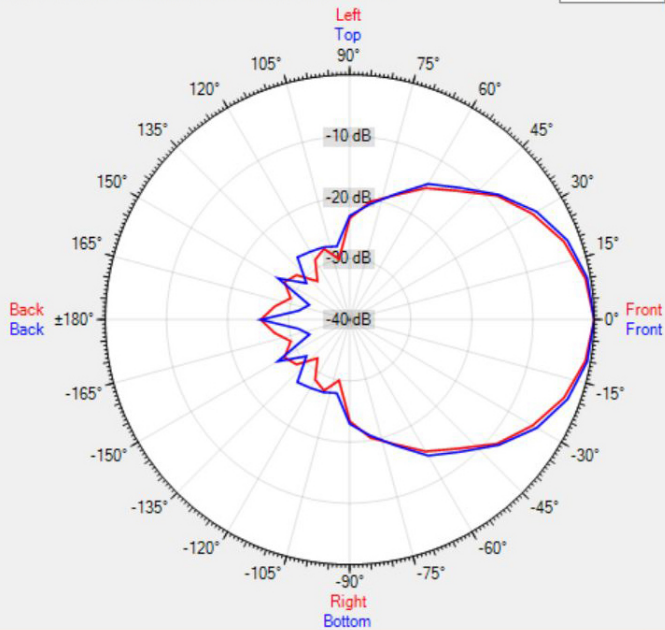

Data Shown: KUBO5 (Apart Audio)  
Display Parameters: Frequency: 8000Hz (1/24th Octave)

Horizontal  
Vertical

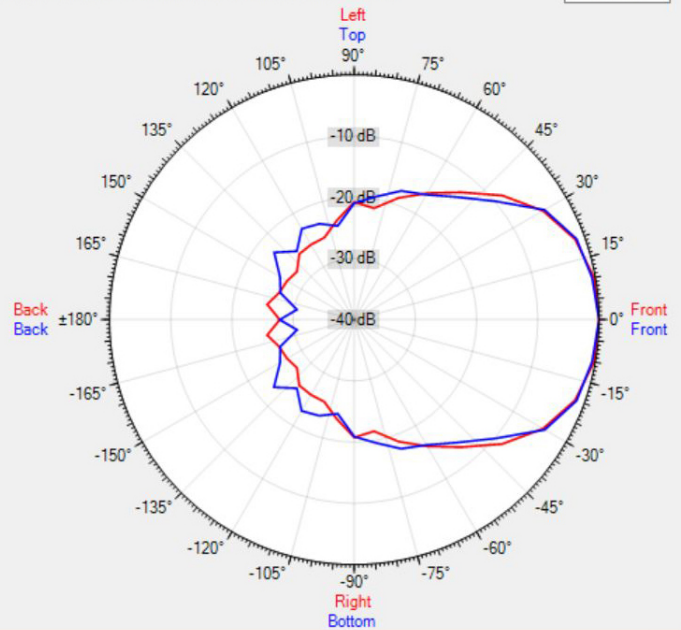

[MORE PICTURES](#)



## ACCESSORIES



### LRAPRE-BL

Premium light rail adaptor KUBO3/5,SDQ5P,OVO5, pack of 2

### LRABAS-BL

Basic light rail adaptor KUBO3/5, SDQ5P, OVO5, pack of 10