

AC12.8SET

Combination of AUDIOCONTROL12.8
+ AC12.8FP



AC12.8SET is an AUDIOCONTROL12.8 with the AC12.8FP feature pack already built-in. The AUDIOCONTROL12.8 matrix controls much more than your audio! You can have different sound sources in different zones at various volume levels, do selective paging and on top of that control other devices as well. Briefly: your all in one audio and control center.


The Feature Pack expands the functionalities of the AUDIOCONTROL with message player/recorder, logical inputs & 0-10V inputs, logic outputs, output delay and zone combining.

For more information about this AUDIOCONTROL SET, please check the product pages or technical sheets of AUDIOCONTROL and Feature Pack.

TECHNICAL SPECIFICATIONS

19" (483 mm wide) rack mounting	yes	height- rack units (1U=44 mm) in U	1
depth (build in) in mm	308	depth (incl front) in mm	313
power supply	115 - 230 VAC	power consumption (max) in watts	75
zone outputs	8 configurable	output level balanced (dB)	0
output level unbalanced (dB)	5	S/PDIF output	yes
signal to noise level SNR (dB)	>100	total harmonic distortion TBH (%)	<0.005
crosstalk (dB)	>95	music level control	yes
MIC level control	yes	VCA level control	Yes
source selection per zone	yes	MIC inputs balanced	6
MIC inputs unbalanced	6	inputs with Phantom power	6
Phantom power voltage in volts	24	noise gate on MIC	yes
selectable input dynamics	yes	selectable output dynamics	yes
line input balanced	6 configurable	line input unbalanced	6 configurable
S/PDIF input	1 stereo	tone control	yes
RS232 (serial communication port)	yes	wall panel controls	yes
priority input contact	no	maximum qty paging Mics	120
chime	yes	emergency input	yes
priority output contact	yes	priority levels	configurable
frequency response (in Hz)	20 - 30 k	applicable in 100V	yes
applicable low impedance	yes	Net weight product (kg)	3.90

MORE PICTURES

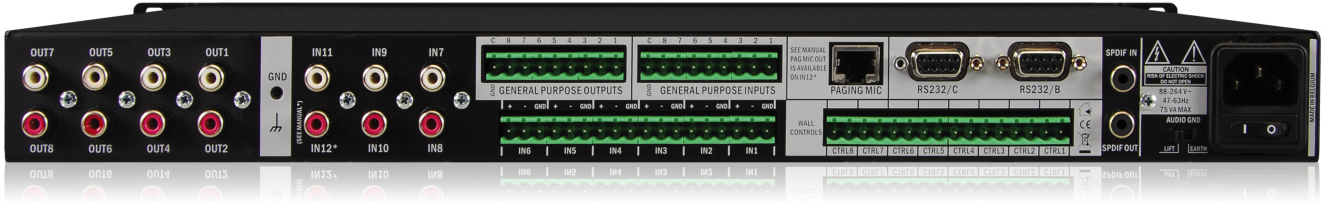

ACCESSORIES



N-VOL10K-W

10 K-ohm volume control, white



DIPEX

Digital Priority/Emergency Extender for AUDIOCONTROL12.8