


Input and Output Terminals





- ① LAN Port (RJ45 for Network Control)
- ② Monitor Output (D-sub 15pin, Female)
- ③ USB Type A (1.5A)
- ④ PC 1 Input (D-sub 15pin, Female)
- ⑤ HDBaseT (RJ45)
- ⑥ DVI-D Input
- ⑦ Composite Video (RCA)
- ⑧ HDMI 1
- ⑨ HDMI 2 / MHL
- ⑩ RS-232 Input (D-sub 9pin, Male)
- ⑪ PC 2 Input (R / Pr, G / Y, B / Pb, H, V)
- ⑫ 3D Sync Output
- ⑬ RCA Audio L / R Input / L / R Output
- ⑭ Service
- ⑮ Audio Input (mini Jack)
- ⑯ Wired Remote Input / Output
12V Trigger

Dimensions

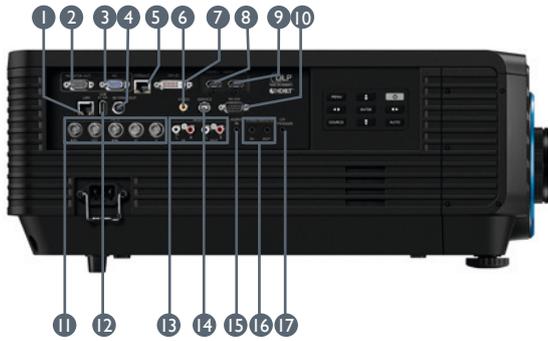


Distance Chart

Lens						Wide Zoom (LS2ST1)				Standard (LS2SD2)				Semi Long (LS2LT1)				Long Zoom (LS2LT2)				Wide Fix (LS2ST3)					
Throw Ratio						1.1 ~ 1.3				1.54 ~ 1.93				1.93 ~ 2.9				3 ~ 5				0.778					
Diagonal		Image Width		Image Height		Offset (A)		O		Distance				Distance				Distance				Distance					
						Wide / Tele		Wide / Tele		Wide		Tele		Wide		Tele		Wide		Tele		N / A					
(inch)	(m)	(inch)	(m)	(inch)	(m)	(inch)	(m)	(inch)	(m)	(inch)	(m)	(inch)	(m)	(inch)	(m)	(inch)	(m)	(inch)	(m)	(inch)	(m)	(inch)	(m)				
80	2.03	68	1.72	42	1.08	2.1	0.054	23.3	0.592	75	1.90	88	2.24	104	2.65	131	3.33	131	3.33	197	5	204	5.17	339	8.62	53	1.34
100	2.54	85	2.15	53	1.35	2.6	0.067	29.1	0.740	93	2.37	110	2.80	131	3.32	164	4.16	164	4.16	246	6.25	254	6.46	424	10.77	66	1.68
120	3.05	102	2.58	64	1.62	3.2	0.081	35	0.888	112	2.84	132	3.36	157	3.98	196	4.99	196	4.99	295	7.5	305	7.75	509	12.92	79	2.01
150	3.81	127	3.23	79	2.02	4.0	0.101	43.7	1.111	140	3.55	165	4.20	196	4.98	245	6.24	245	6.24	369	9.37	382	9.69	636	16.15	99	2.51
200	5.08	153	3.88	95	2.42	5.3	0.135	58.3	1.481	187	4.74	220	5.60	261	6.63	327	8.31	327	8.31	492	12.49	509	12.92	848	21.54	132	3.35
300	7.62	254	6.46	159	4.04	7.9	0.202	87.4	2.221	280	7.11	331	8.40	-	-	-	-	491	12.47	738	18.74	763	19.39	1272	32.31	-	-
400	10.16	339	8.62	212	5.38	10.6	0.269	116.6	2.962	-	-	-	-	-	-	-	-	655	16.63	984	24.99	-	-	-	-	-	-

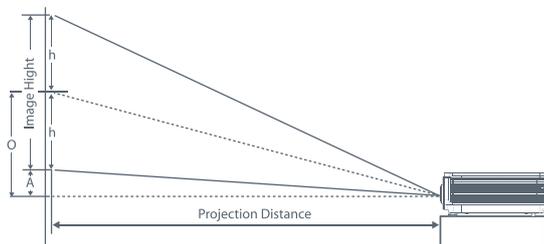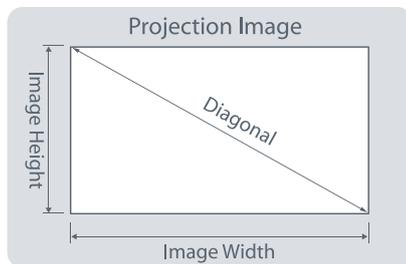

Ceiling Mount Chart

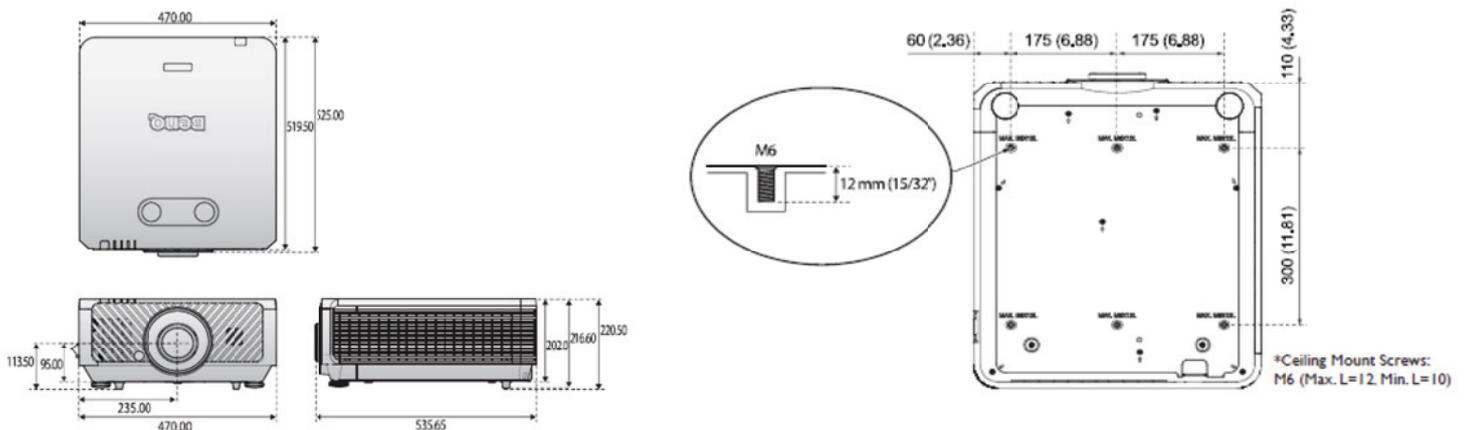

BenQ Europe B.V.

Meerenakkerweg 1-17
5652 AR Eindhoven
The Netherlands
Tel: +31 88 8889200

BenQ.eu

© 2019 BenQ Corp. Specifications may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively. Latest Update: 2019-07-02

BENQ