

# OVO3T-BL

3" small design loudspeaker, black



The OVO3T is a 3" small design two-way loudspeaker and is one of the most popular models of the Apart OVO-series.

This series is loved for its price and sound quality and because of their elegant design these loudspeakers fit into every interior. Budget and quality sound are united in the OVO3T.

The Quick-Fit cable clamps ensure quick and easy mounting, and the OVO3T speakers can be painted in any colour.

The speaker functions in 100 volt as well as in 16 ohms low impedance. The included bracket allows flexible positioning, while the sturdy ABS plastic housing guarantees years of trouble free musical enjoyment.

Affordable, but by no means a compromise on sound quality – typically Apart!


## TECHNICAL SPECIFICATIONS

height in mm	160	width in mm	110
depth in mm	117	loudspeaker system	2-way
woofer size in inch	3	woofer cone material	coated paper
tweeter size in inch	1	mounting system	turn / tilt bracket
colour	black / white	100V transformer power taps in watts	6 - 3 - 1.5
impedance (ohms)	16	low impedance dynamic power in watts	40
low impedance RMS power in watts	20	SPL 1W/1m in dB	82
max SPL 1m in dB	97	frequency response in Hz	90 - 20K
main construction material	ABS plastic	grille main material	steel
IP rating		Horizontal dispersion angle 1000 Hz	180°
Vertical dispersion angle 1000 Hz	180°	closest RAL colour (subject to deviations)	RAL9003 (W) / RAL9011 (BL)
Net weight product (kg)	1,05		

**POLAR PLOTS**


Data Shown: OVO3T (Apart Audio)  
Display Parameters: Frequency: 1000Hz (1/24th Octave)

Horizontal  
Vertical

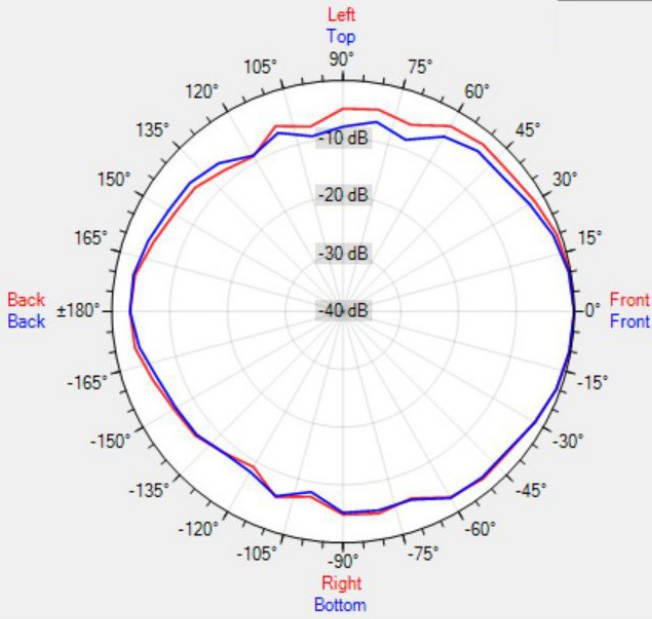


Data Shown: OVO3T (Apart Audio)  
Display Parameters: Frequency: 2000Hz (1/24th Octave)

Horizontal  
Vertical

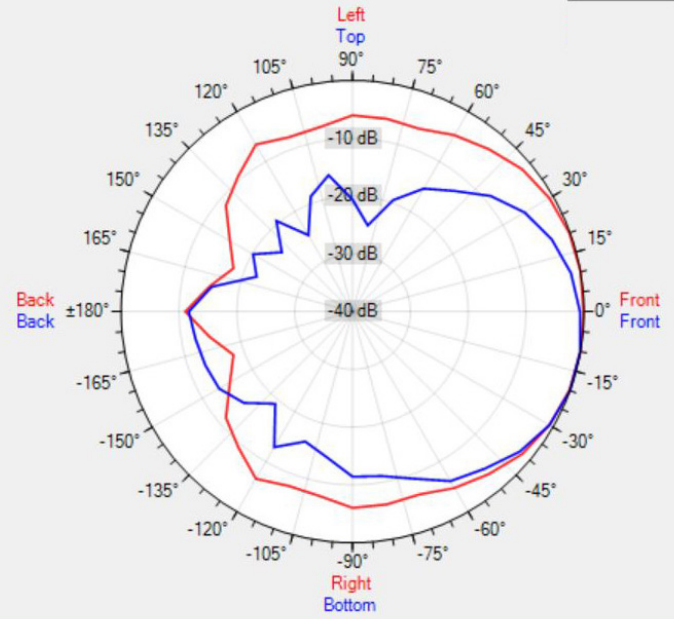


Data Shown: OVO3T (Apart Audio)  
Display Parameters: Frequency: 4000Hz (1/24th Octave)

Horizontal  
Vertical

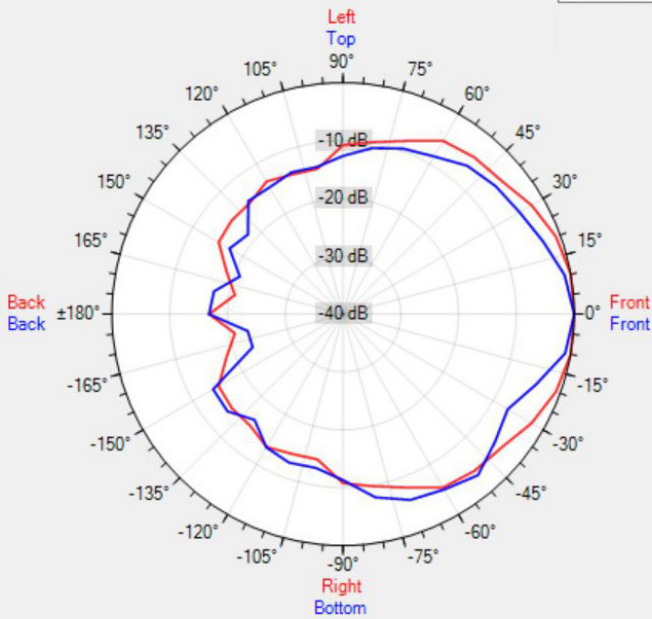

Data Shown: OVO3T (Apart Audio)  
Display Parameters: Frequency: 8000Hz (1/24th Octave)

Horizontal  
Vertical

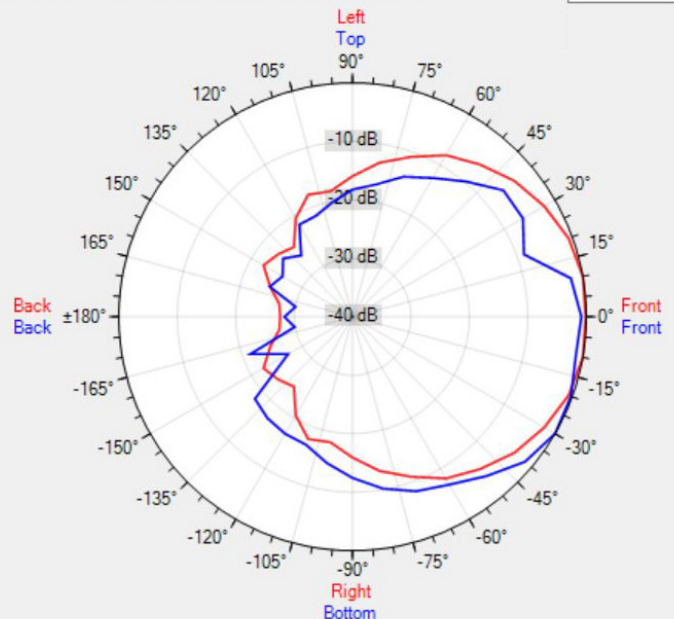

[MORE PICTURES](#)

